


Mystical Whimsy Quilt – Class 8



Drunkard's Path Block using the Circular Attachment



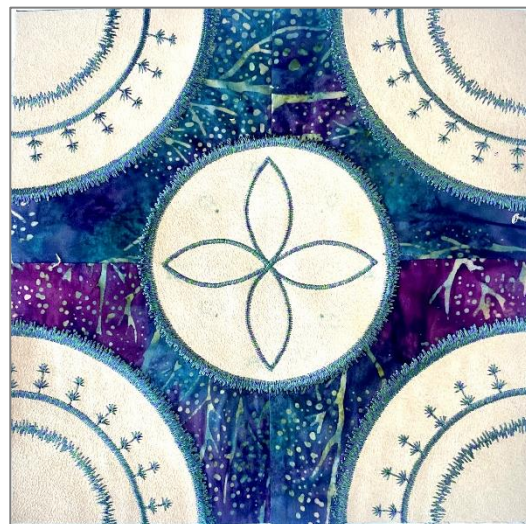


Creating a Drunkard's Path block can be a challenge to sew with its curved piecing, but it doesn't have to be. You can create this block easily using the Circular Attachment and appliquéed circles. To add even more interest to the block we added some Radiant Stitches and even a flower using the Circular attachment. You will be amazed how many techniques are packed into this block.



Supplies:




<p>Fabric #5* Faux Suede or Suede</p>		<p>2(7" x 7") Drunkard's Path Piecing 2(5" x 5") Drunkard's Path Center</p>
<p>Fabric #6</p>		<p>2(10" x 10") Drunkard's Path Piecing</p>
<p>2A Fancy Stitch Foot</p>		<p>Part #820774096</p>
<p>Open-Toe Appliqué Foot for IDT™ System, 9mm or Clear Open-Toe Foot for IDT™ System</p>		<p>Part #820213096 or Part #820916096</p>

<p>Perfect 1/4" Foot with Guide for IDT™ System or 1/4" Right Guide Foot for IDT™ System</p>		<p>Part #821063096 or Part #820924096</p>
<p>Sewing Star Foot for IDT™ System</p>		<p>Part #820654096</p>
<p>Extension Table</p>		<p>Part number will be dependent on PFAFF® sewing machine model</p>
<p>Circular Attachment & Template #2</p>		<p>Part #821026096</p>
<p>PFAFF® Tear-A-Way Stabilizer 20" x 10 yards</p>		<p>Part #821399096 2(10" x 10") 2(5" x 5")</p>
<p>PFAFF® Topstitch Needle Size 90/14, 5 pack</p>		<p>Part #821196096</p>
<p>PFAFF® Universal Needle Size 80/12, 5 pack</p>		<p>Part #821194096</p>
<p>50wt Cotton Sewing Thread</p>		
<p>Robison-Anton Poly Filament Bobbin Thread</p>		<p>Part #140000905</p>
<p>Robison-Anton 40wt Rayon Thread</p>		<p>Part number based on color</p>

PFAFF® 4"/10.2cm Micro Tip Straight Blade Scissor		Part #821286996
PFAFF® 6"/15.2cm Right Hand Appliqué Scissor or PFAFF® 6"/15.2cm Left Hand Appliqué Scissor		Part #821292996 or Part #821293996
Water-soluble Marker		
SINGER® Steam Iron		Part number dependent on iron model.
Rotary Cutter, Mat, 6" x 24" Ruler		
Straight Pins		
Other Supplies <ul style="list-style-type: none"> • Ironing Surface • Pressing Cloth 		

Sewing Machine Preparations

1. Insert a PFAFF® Topstitch Needle Size 90/14 in your PFAFF® sewing machine.
2. Attach the Extension Table, this will give you a larger sewing surface and better support for your project.
3. Thread with Robison-Anton 40wt Rayon thread on top and Robison-Anton Poly Filament Bobbin thread on the bobbin.
4. Remove the presser foot.
5. Snap on the Circular Attachment by snapping the two hooks (A) on the attachment into the two holes (B) on the stitch plate.

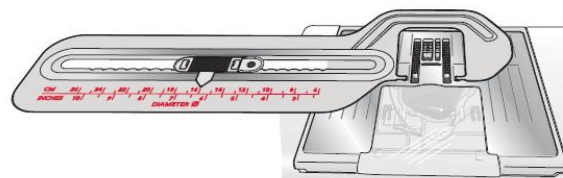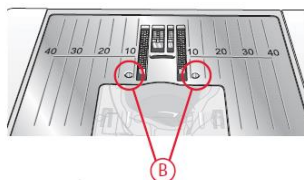
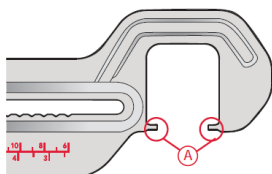


6. Attach the Sewing Star Foot for IDT™ System to your PFAFF® sewing machine and engage the IDT™.
7. Select a Straight Stitch.




Fabric Preparation

1. With the water-soluble marker draw the center lines on the following fabrics:
2(7" x 7") Fabric #5
2(10" x 10") Fabric #6

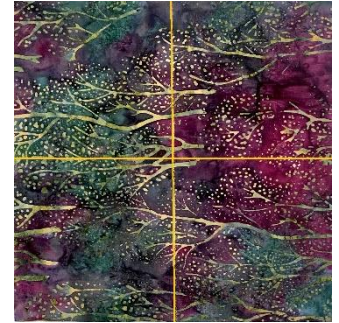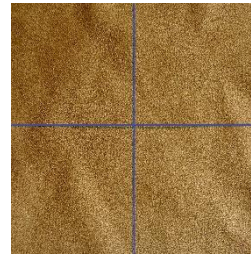

2. Place the 2(10" x 10") pieces of PFAFF® Tear-A-Way Stabilizer under each of the pieces of Fabric #6.
3. Center Fabric #5 on top of Fabric #6 matching the drawn lines.
4. Pin together.

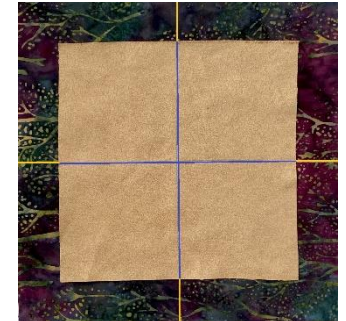


Circular Attachment Sewing Instructions



1. Set the size of the circle on the Circular Attachment by positioning the tip of the SizeGuide above the number that corresponds to the diameter of the circle you wish to stitch. The number on the scale is the diameter of the circle if sewn with a straight stitch, in center position.
Note: If your machine features an automatic thread cutting function, it is recommended that it is not used when the Circular Attachment is snapped on.
2. Move the SizeGuide to a diameter of 16cm, when moving the SizeGuide, hold the attachment with your right hand and move the guide with your left. Note: Do not move the SizeGuide unit by holding the pivot pin, the pivot pin can bend or break.
3. Push the pivot pin through the fabric at the marked intersection point.
4. Place the pivot pin in the hole of the SizeGuide (the inside of the SizeGuide is magnetic which assists in placing the pin in the hole).
5. Lower the presser foot and start to sew the circle.



6. Remove the pivot pin and your fabric from your machine.
7. Cut away the excess fabric with the PFAFF® Appliqué Scissor close to the stitching line.
8. Put the pivot pin back into the center mark and place the pivot pin in the hole of the SizeGuide.
9. Select a satin stitch to cover the raw edge; you may need to adjust the stitch width and/or the stitch position of your stitch to make sure it covers the raw edge. Note: there are many decorative satin stitches to choose from on your machine.

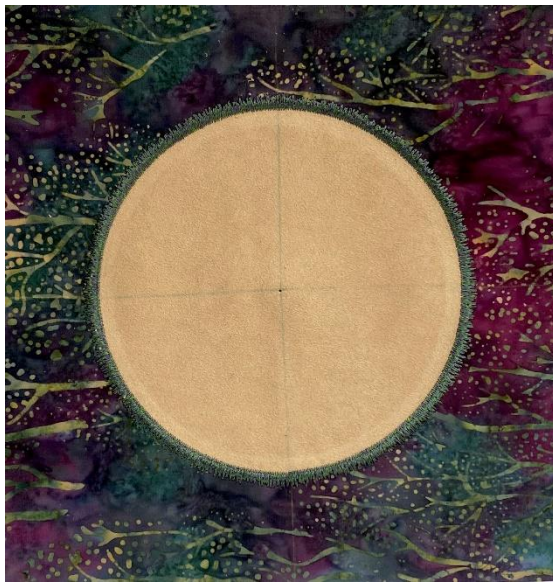

10. Select a Straight Stitch and move the SizeGuide to a diameter of 11 cm.
11. Stitch the Straight Stitch around the circle; you will use this stitched line as your guide for your Radiant Stitches.
12. Remove the pivot pin and your fabric from your machine.

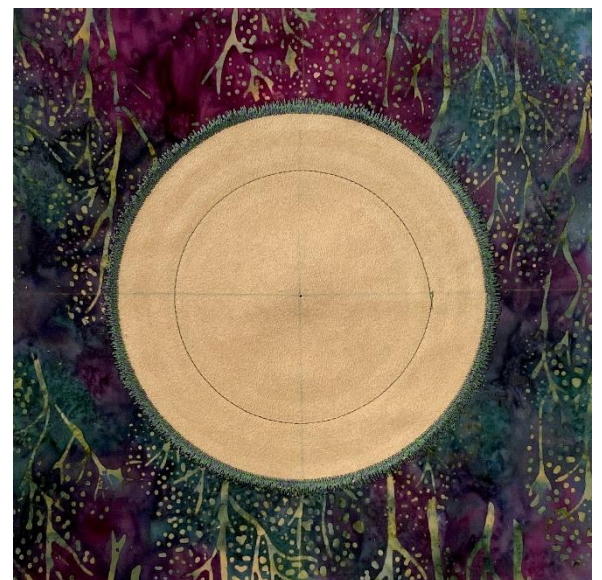
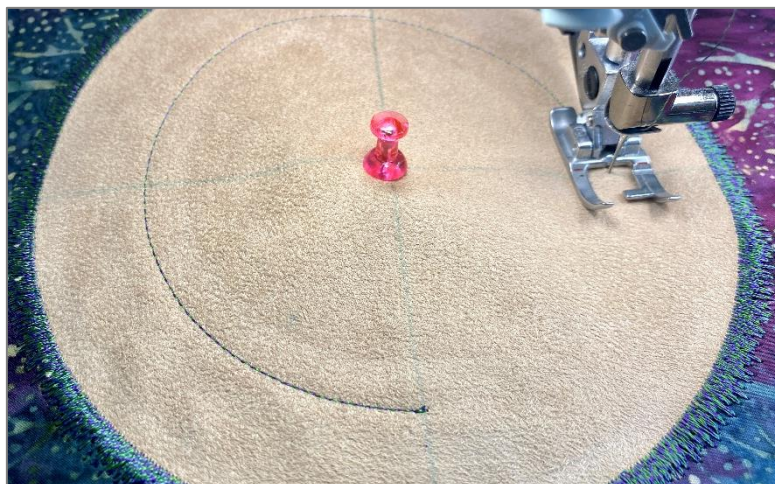


Sewing Machine Preparations



1. Remove the presser foot and remove the Circular Attachment.
2. Attach the Sewing Star Foot for IDT™ System or the 2A Fancy Stitch Foot to your PFAFF® sewing machine. Note: either foot will work for the Radiant Stitches it just depends on your preference.

Sewing Instructions for Radiant Stitches



1. On the *creative icon*™ 2, open the **Help Center**.
2. In the **Help Center**, select **Techniques and Tutorials**.

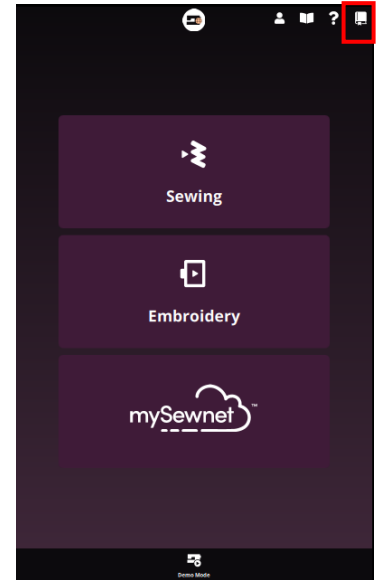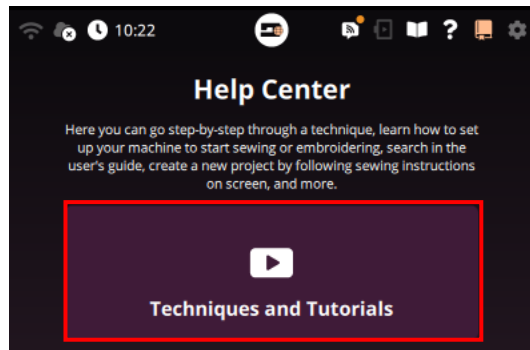




3. Select **Sewing Techniques** and **Exclusive Stitch Techniques**.

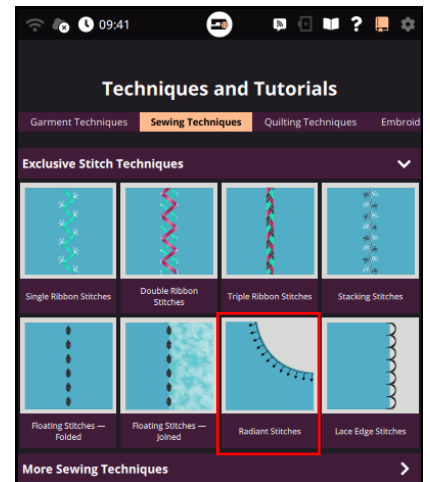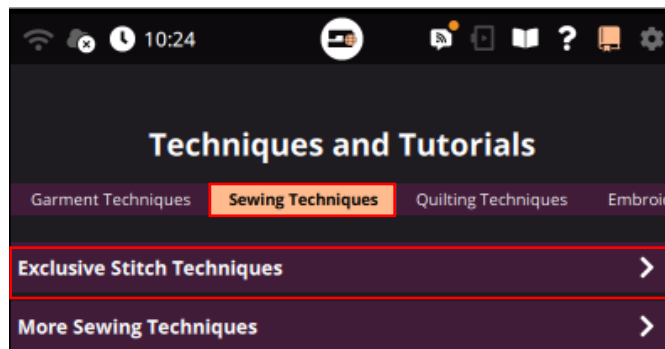

4. Select **Radiant Stitches**.
5. Follow the tutorial and watch the videos for stitching **Radiant Stitches** along a curved line.

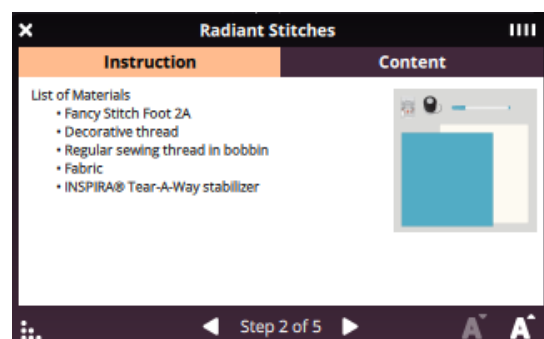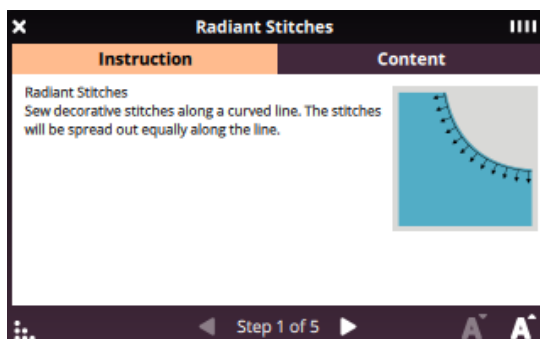

6. You can select your **Radiant Stitch**, by selecting it through the **Content** menu in the tutorial, or select **Techniques** through the **Load Stitch** menu. Note: the **Needle Down** feature will automatically be activated.

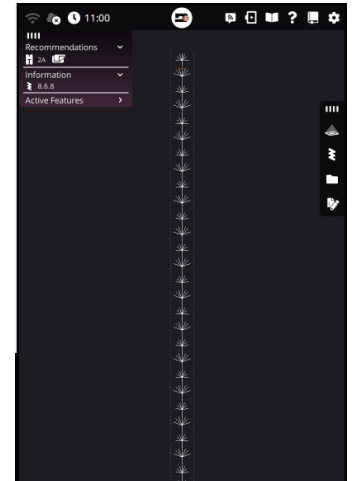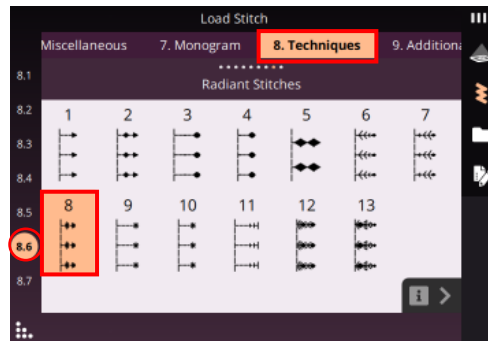
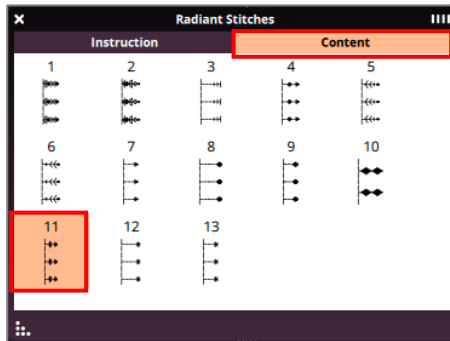


7. Line up the center marking of the presser foot with the stitched circle. Tip: You won't have to match the Radiant Stitch at the beginning and end of the circle as long as you start stitching at one of the drawn centerlines, because we will be cutting up the block on those drawn lines.
8. Touch **Start/Stop** and sew until the machine stops.
9. Turn the fabric so the two side markings on the foot match the stitched circle.
10. Touch **Start/Stop** again and sew until the machine stops. Note: the decorative part of the stitch will be sewn behind the presser foot (the machine will sew backwards and then forwards until it ends up in the pivot position again).
11. Turn the fabric to its original position so that the stitched circle is even with the center marking of the presser foot.
12. Touch **Start/Stop** and the machine will sew the straight stitches along the stitched circle until it stops again.
13. Repeat until you have stitched around the entire circle.




Sewing Machine Preparations


1. Remove the presser foot.
2. Snap on the Circular Attachment and set the SizeGuide to a diameter of 11cm.
3. Attach the Sewing Star Foot for IDT™ System or Clear Open-Toe Foot for IDT™ System or Open-Toe Appliqué Foot for IDT™ System to your PFAFF® sewing machine. Note: any of these feet will work for stitching the narrow zigzag stitch it just depends on your preference.
4. Select **Utility** in the **Load Stitch** menu. Select stitch **1.1.12**.
5. Select **Edit Stitch**; change the **Stitch Width** to **3.0** and **Stitch Length** to **0.8** to create a narrow zigzag stitch.

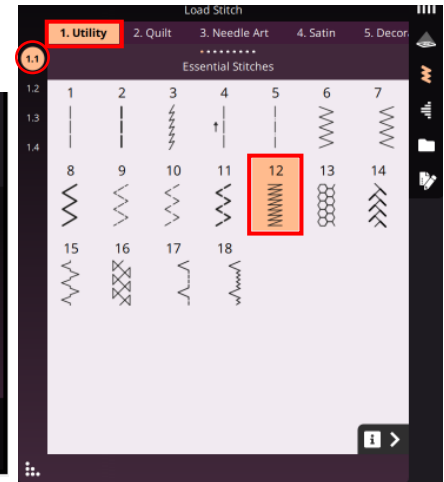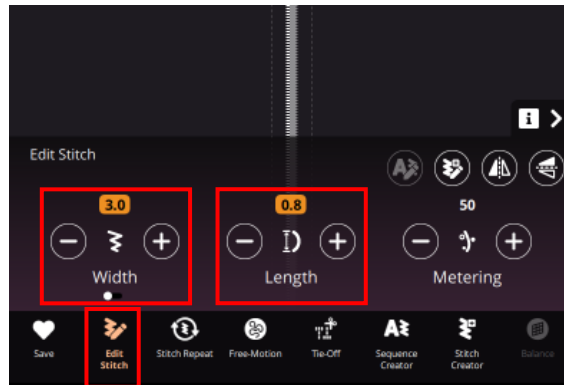

6. Touch the **Save** button.

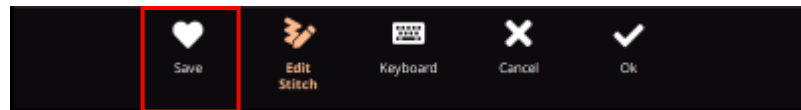


7. A pop-up will appear on screen. In the **Save** pop-up, choose to save your stitch to the **mySewnet Cloud** or to an **USB device** (only visible as a selection when a USB device is connected to the machine).
8. Touch in the **File Name** field. Backspace to remove the default name. Type in the desired name for the stitch, I named mine "**Narrow Satin stitch**" then touch **Save**.

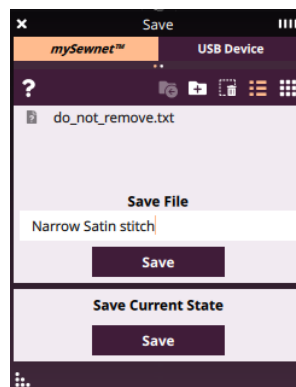

Sewing Instructions for Narrow Zigzag Stitch


1. Push the pivot pin through the fabric at the marked intersection point.
2. Place the pivot pin in the hole of the SizeGuide.

3. Stitch the Narrow Satin stitch over the straight stitch at the base of the Radiant Stitches.

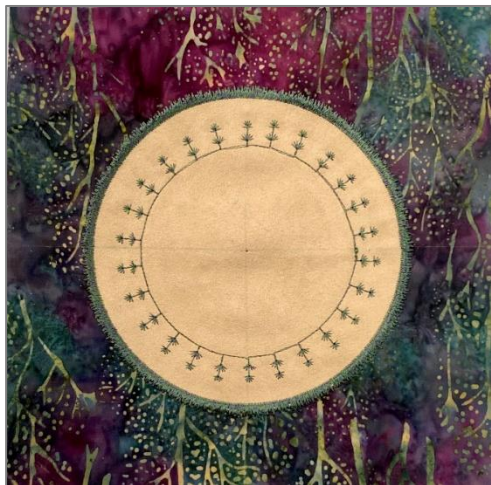

Sewing Machine Preparations

1. Set the SizeGuide to a diameter of 8cm.
2. Select a decorative satin stitch.

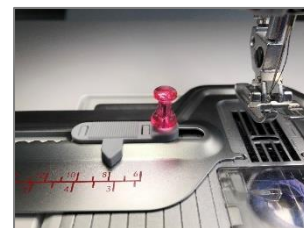

Sewing Instructions

1. Stitch the decorative satin stitch in the middle section of the circle.
2. Remove the fabric and pivot pin from the machine.
3. Remove the stabilizer.
4. Press using a pressing cloth with the SINGER® Steam Iron.
5. Trim the block down to an 8¾" square, making sure the circle is centered in the block.
6. Cut the block into quarters.




Sewing Machine Preparations

1. Remove the presser foot and remove the Circular Attachment.
2. Insert a PFAFF® Universal Needle Size 80/12 in your PFAFF® sewing machine.
3. Thread with 50wt Cotton sewing thread on top and on the bobbin.
4. Attach the Perfect ¼" Foot with Guide for IDT™ System or the ¼" Right Guide Foot for IDT™ System to your sewing machine. Engage the IDT™.


Sewing Instructions for Drunkard's Path Block

1. This is where you see how easy it is to sew a Drunkard's Path block without having to do curved piecing.
2. Turn the squares so the circle pieces are in the outer corners.
3. Stitch the squares together using a ¼" seam allowance; let the guide on the foot assist you in keeping an accurate ¼" seam.
4. Press the block.

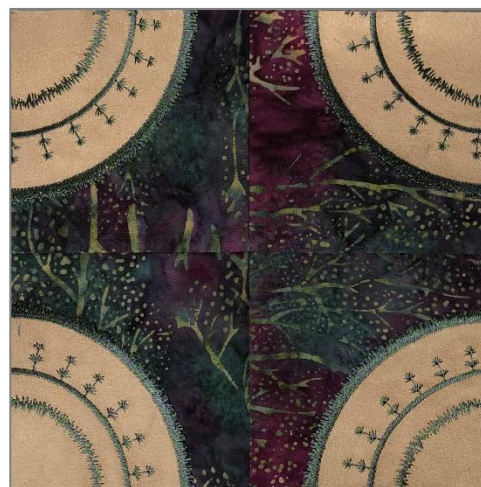

Fabric Preparation

1. On the 2(5" x 5") pieces of Fabric #5 mark with the water-soluble marker the center lines.
2. Center Fabric #5 on top of pieced block matching the seam lines and the drawn lines.
3. Center the 2(5" x 5") pieces of PFAFF® Tear-A-Way Stabilizer under the blocks.
4. Pin together.

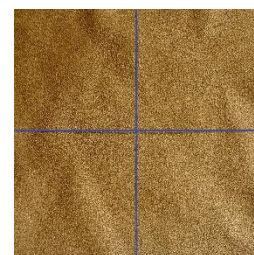

Sewing Machine Preparations



1. Insert a PFAFF® Topstitch Needle Size 90/14 in your PFAFF® sewing machine.
2. Thread with Robison-Anton 40wt Rayon thread on top and Robison-Anton Poly Filament Bobbin thread on the bobbin.
3. Remove the presser foot.
4. Snap on the Circular Attachment.
5. Attach the Sewing Star Foot for IDT™ System to your PFAFF® sewing machine and engage the IDT™.
6. Select a Straight Stitch.

Sewing Instructions

1. Set the SizeGuide to 10.
2. Push the pivot pin through the fabric at the marked intersection point.
3. Place the pivot pin in the hole of the SizeGuide.
4. Lower the presser foot and start to sew the circle.
5. Remove the pivot pin and your fabric from your machine.




6. Cut away the excess fabric with the PFAFF® Appliqué Scissor close to the stitching line.

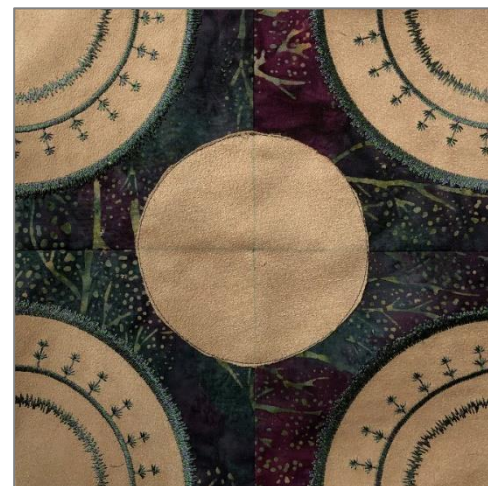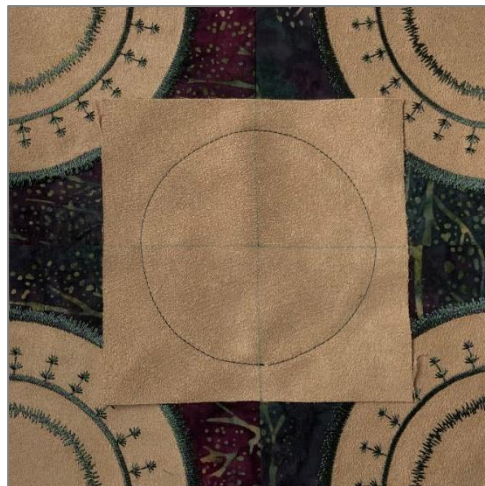

7. Put the pivot pin back into the center mark and place the pivot pin in the hole of the SizeGuide.
8. Select a satin stitch to cover the raw edge; you may need to adjust the stitch width and/or the stitch position of your stitch to make sure it covers the raw edge. Note: there are many decorative satin stitches to choose from on your machine.





9. You should now have two blocks that look like this.

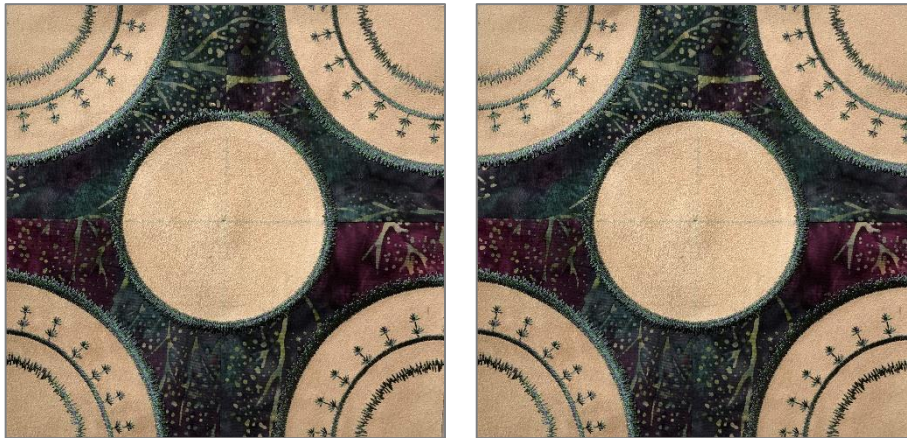


Sewing Instructions for a 4-Petal Flower using the Circular Attachment


1. Place template number 2 on the block as shown below. Be sure to match the center point of your flower with the center intersection point.

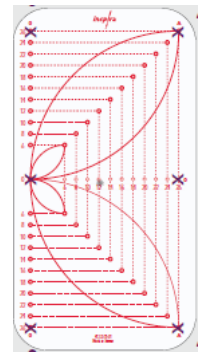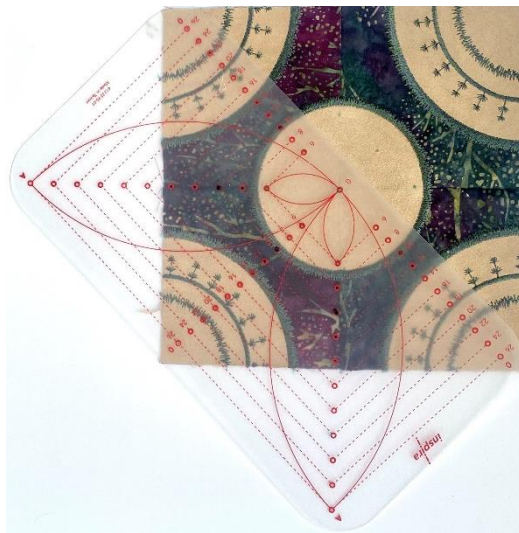



2. Using the water-soluble marker, mark all the holes for the size 6 flower. The number "0" and the letter "A" are printed on the template. Transfer the letters/numbers to your fabric.

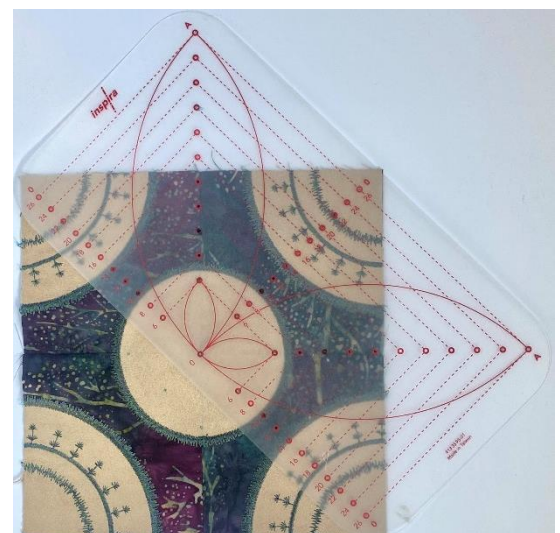


3. Flip the template horizontally. Make sure the vertical “0” markings line up with the holes in the template. Put markings in the rest of the holes (marked 6) and transfer the “0” & “A” as well.

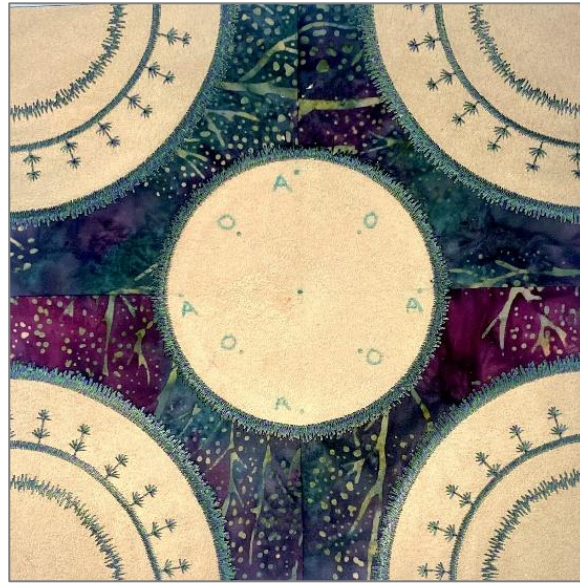




4. Set the SizeGuide to 6 on the Circular Attachment.
5. Push the pivot pin through the fabric in one of the points marked “0”.
6. Place the pivot pin in the hole on the SizeGuide.
6. Select the **Narrow Satin Stitch** that you saved.
7. Activate **Needle Stop Down** on your machine.
8. Sew from “A” through the center until you reach the next “A”.

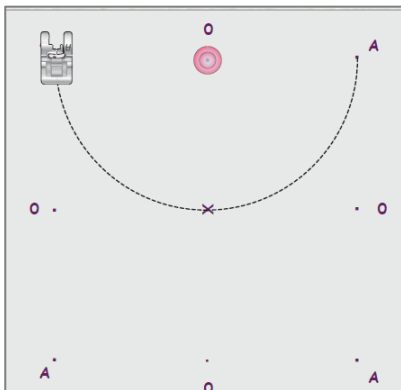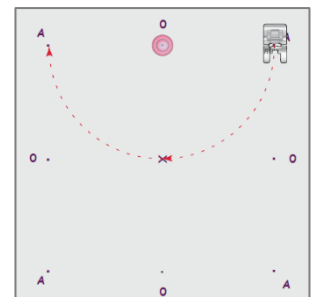

9. Leave the needle down in the fabric. Move the pivot pin to the next "0" point. Sew from "A" through the center until you reach the next "A".

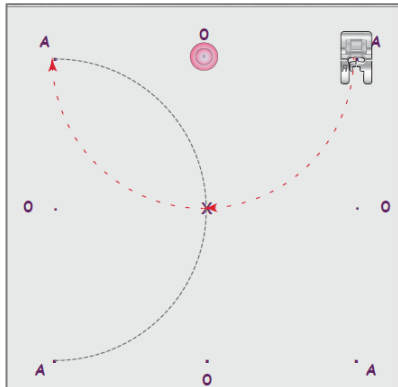

10. Leave the needle down in the fabric. Move the pivot pin to the next "0" point and repeat sewing from "A" to "A" until the flower is complete.

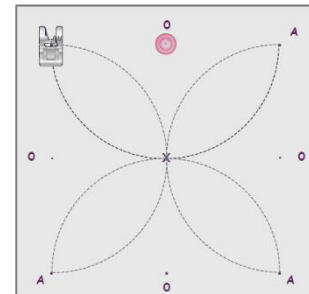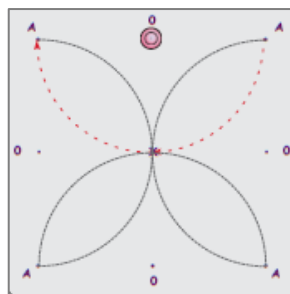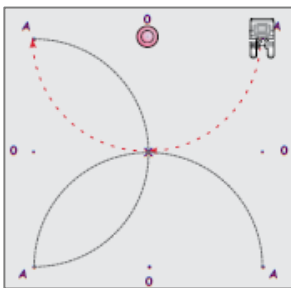

11. Remove the fabric and pivot pin from the machine.
12. Remove the stabilizer.
13. Press the block with a pressing cloth.
14. You should have two Drunkard's Path blocks that look like this and measure 8¼" x 8¼".

